



**Maximum Performance**



## **FCU3186/800**

### **FEATURES AND BENEFITS**

- Large surface contact with linen over an angle of 300° for high ironing capacity
- Auto adjustable ironing speed technology according to the residual moisture
- Overheating check system: For increased safety of your operations
- Finger protection and emergency button for more safety
- Finger protection and emergency button for more safety
- Automatic cool down
- Indication of ironing speed and temperature
- Frequency controlled motor

- Overdimensioned fan for flexible installation
- Reverse mode possible
- Space saving installation against the wall is possible: front return

### **OPTIONS**

- Stop pedal
- Vacuum table


### **CONTROL**

- MCX- Easy to operate microprocessor

**CYLINDER HEATED IRONER**

TYPE		FCU3186/800
ROLLER DIAMETER	mm	800
USEFUL ROLLER LENGTH	mm	3186
HEATING		
Electric	kW	75
Gas	kW	110*
Steam	Kg	190
MOTORS		
Roller	kW	0,9
Fan	kW	2x0,55/0,75
IRONING CAPACITY**		
Electric	kg/h	195
Gas	kg/h	195
Steam	kg/h	195
ROLLER SPEED	m/min	3-15
ELECTRIC CONNECTION		380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz, 380-415V 3AC-N 50/60 Hz, 440-480V 3AC 60 Hz
DIMENSIONS		
H×W×D	mm	1985×4260×1915
Net weight (EL/G/S)	kg	2610 / 2480 / 2900
TRANSPORT DATA		
HxWxD	mm	2080×4380×2080
Packed weight (EL/G/S)	kg	2870 / 2740 / 3160

\* G20, 20 mbar \*\* According to ISO 9398-1

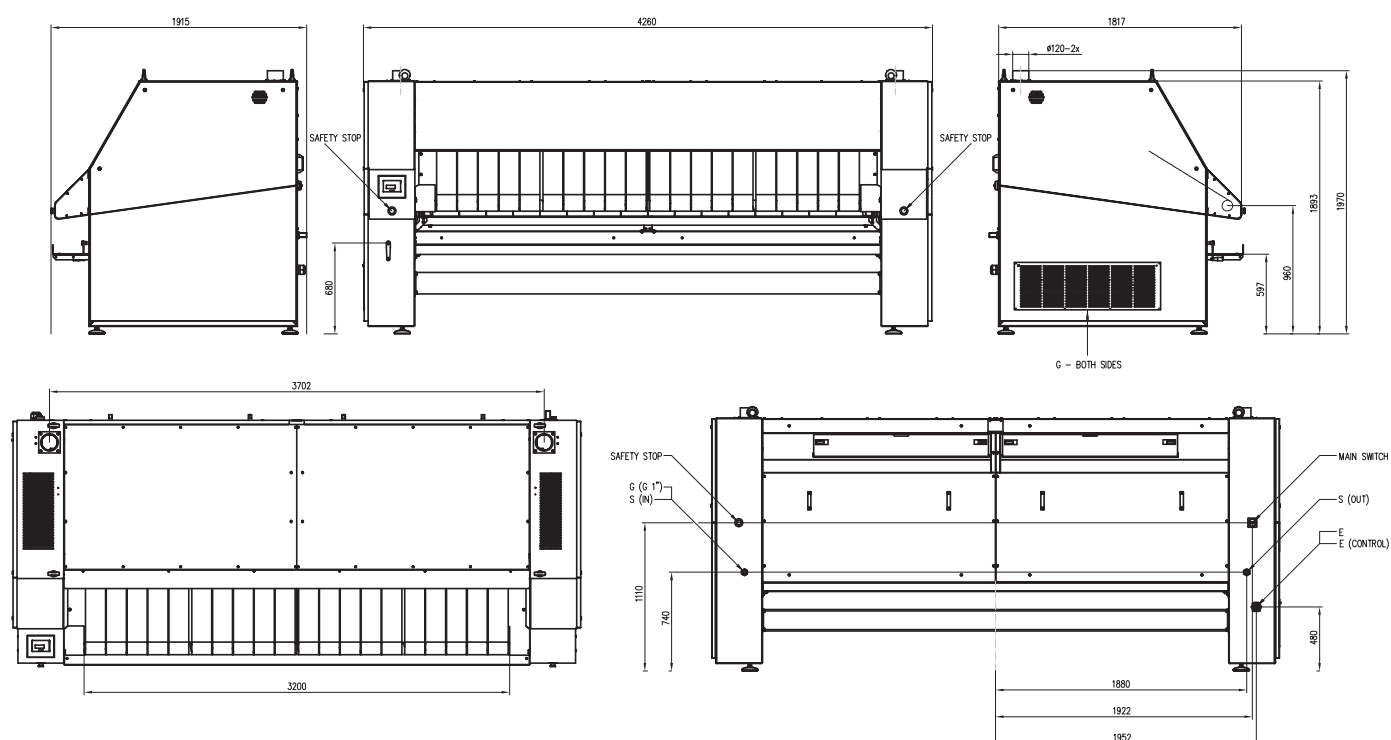

#### CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. [www.unimac.com](http://www.unimac.com)

UniMac by Alliance Laundry Systems